



16780 PER
Buy Line 0954

Manufacturers of Mounting Devices for TV and Video Systems

YOKE STYLE BRACKETS

Specifications:

The TV or monitor mount shall be a Peerless Yoke Style bracket, or equivalent, with the specific model of the bracket to be specified only after the TV or monitor style and size have been selected.

The yoke type bracket shall be constructed so that both height and width can be adjusted, and shall include a universal perforated tray to facilitate attachment of the TV or monitor. The bracket, when properly installed, shall be capable of carrying a load of 300 lbs.

Model	Width	Height
1479-160	13.75"-22"	12"-18"
1479-128	13.75"-22"	18"-24"
1480-161	22"-36"	12"-18"
1480-163	22"-36"	18"-24"
1481-234	22"-36"	24"-30"



The Yoke Style bracket shall be combined with the appropriate mounting kit for wall or ceiling installation. (SEE BELOW AND PAGE 2).

1433-460 STRUCTURAL CEILING KIT

Mount directly to a slab, truss, or beam by bolting, welding, or lagging the structural ceiling box in place. The yoke bracket can be extended down with any length of Stock no. 1445-000 Extension Column required.



Specifications:

The ceiling mount shall be a Peerless Structural Ceiling mount and shall be located where indicated on the plans. **The specific model bracket to be determined when the TV is selected.** It shall consist of a 10 ga. ceiling box measuring 8" x 11". The ceiling box shall have a baked enamel finish of Almond color. It shall have a yoke bracket that is compatible with the TV selected. The yoke bracket shall have a universal, perforated tray which facilitates attachment to the bottom of the TV set. Assembly and installation shall be made in accordance with the drawings and printed installation instructions provided. The installation contractor shall mount the ceiling box securely by a method to be determined by the contractor. All fasteners for assembly of the bracket shall be furnished by the manufacturer. Hardware for mounting the ceiling box shall be furnished by the contractor. The yoke and supporting brackets shall be finished in Solar Black baked enamel.

peerless sales company

1950 Hawthorne Avenue
Melrose Park, IL 60160

1-800-729-0307

In Illinois call 708-865-8870

FAX: 708-865-2941


YOKE STYLE BRACKETS

1433-450 EXPOSED GRID SUSPENDED CEILING KIT

Use in areas where a typical 2'x2' or 2'x4' grid is in place. This patented system eliminates the need to bolt the bracket directly into the structural ceiling above. A steel ceiling box replaces one of the ceiling tiles. Support bars over 8 ft. long

Specifications:

The ceiling mount shall be a Peerless Exposed Grid Suspended Ceiling mount and shall be located where indicated on the plans. It shall consist of: a 12 ga. steel box section measuring 2'x2' with baked enamel finish of off white; two galvanized steel tubular support bars 1-1/2" x 2" x 16 ga. x 99" long; appropriate support bar brackets and all necessary fasteners. It shall also consist of a yoke bracket such as that described in the specifications on page 1. Assembly and installation shall be made in accordance with the drawings and printed installation instructions which call for: the load to be evenly distributed over a large area utilizing the 99" long support bars; the addition to the metal box of four tie wires to be secured to the true ceiling; the installation of a cable which shall be secured to a solid structural member above and then attached directly to the bracket that mounts on the center pivot bolt. The installation contractor shall also locate electric and antenna service outlets for each unit in accordance with local codes.

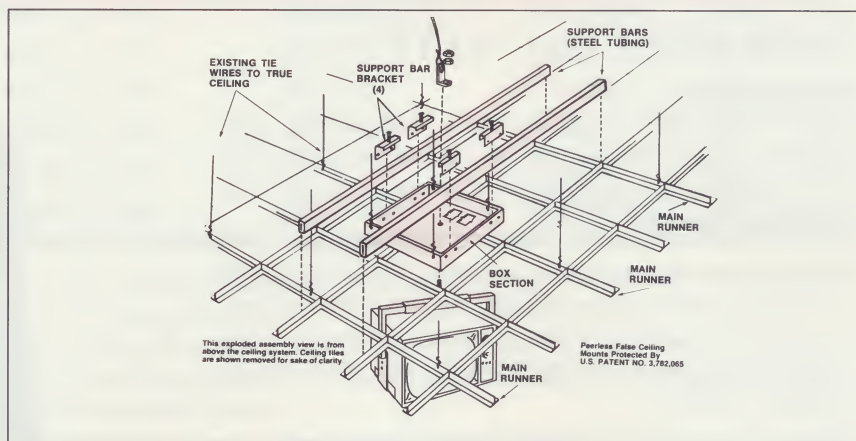

1433-465

FINISHED CEILING KIT

Where you have plasterboard or some other material directly over ceiling joists, you can use the finished ceiling mount. Similar to the structural ceiling mount, but with an 8" x 26" ceiling tray which mounts perpendicular to joists. Ceiling tray is designed to attach to joists, or other ceiling members on 12", 16", 20", or 24" centers.




YOKE STYLE WALL KIT

Use Peerless Yoke Style Bracket to create a wall mount by adding one of the three different length wall arms (13", 16", or 20") to one of the yoke style brackets listed on page 1.

Specifications:

The wall swivel bracket shall be a Peerless Yoke Style bracket and shall be mounted where indicated on the plans. **The specific model bracket to be determined when the TV is selected.** The bracket shall consist of a steel wall plate, 6" x 12" x 12 ga. with a 1-1/2" x 2" x 14 ga. rectangular tubular steel arm. The arm shall extend at right angles to the wall and shall suspend a yoke bracket that is compatible with the TV selected. The yoke bracket shall have a universal, perforated tray which facilitates attachment to the bottom of the TV set. The bracket shall provide unrestricted swivel and tilt.

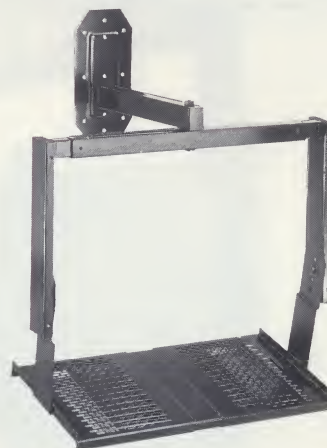

YOKE BRACKET ACCESSORIES

EXTENSION COLUMN #1445-000

Use to lower elevation of the installed bracket. 1-3/4" diameter steel column has 1/2" threaded rod running through the center. Finished in woodgrain vinyl.


FINISHING RING #1418-000

3-5/8" diameter chrome escutcheon plate. Use when extension column comes through hole in suspended ceiling tile.

WALL BRACKETS

16780 PER
Buy Line 0954

SINGLE ARM DESIGN WALL MOUNTS

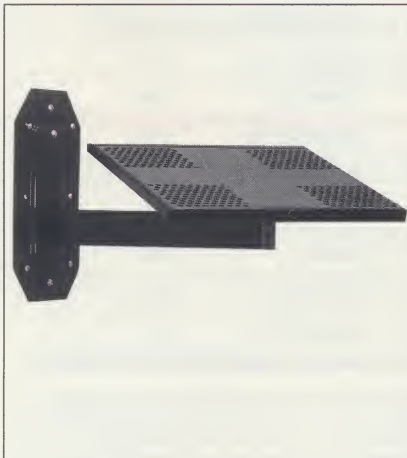

Wall mounting a television, or monitor on the wall has become a popular way to conserve space and create the uncluttered look which is demanded in many applications.

Select only the style and type of wall bracket to be specified. This will help in determining the installation height of the internal wall mounting plate. The

specific wall bracket model number should not be called for until the TV set is selected and will be determined by:

- 1.) Size of the TV set to be mounted.
- 2.) Degree of tilt required.
- 3.) Level of security required (i.e. locking or non-locking tray).

Specifications:

The wall bracket shall be a Peerless Single Arm Style Bracket and shall be mounted where indicated on the plans. The bracket shall be one that [specify degree of tilt, locking or non-locking, etc.]. The specific model bracket to be determined when the TV is selected. The bracket shall consist of a steel wall plate 6" x 12" x 12 ga., a 1-1/2" x 2" x 14 ga. rectangular tubular arm, and a swivel tray that is compatible with the TV selected. Assembly shall be in accordance with the instructions furnished by



the manufacturer. The kit shall contain all hardware for assembly of the bracket. The installation contractor shall furnish all fasteners necessary for mounting the units to the wall.

SEE PAGE 4 FOR SPECIFIC MODEL NUMBERS

WALL MOUNTING PLATES


Specify one of the wall plates shown, along with the style and type wall bracket to be installed. All of our wall plates have the same hole pattern to match Peerless wall brackets.

Specifications:

The internal wall mounting plate shall be a Peerless Stock # _____ and shall be mounted where indicated on the plans. Height of the bracket to be in accordance with

manufacturers recommendations. It shall be made of 12 ga. steel with a black baked enamel finish. It shall have 1/4-20 threads which retain the 1/4" studs (supplied by manufacturer) which will protrude beyond the finished plaster surface. The contractor will mount the plates by either welding or bolting in

place. All hardware, fasteners, etc. to be supplied by contractor. (For stock # 1414 series plates add: "The appropriate contractor will mount and connect the single gang electrical boxes.") After wall surface has been finished, contractor shall remove previously placed 1/4" studs.

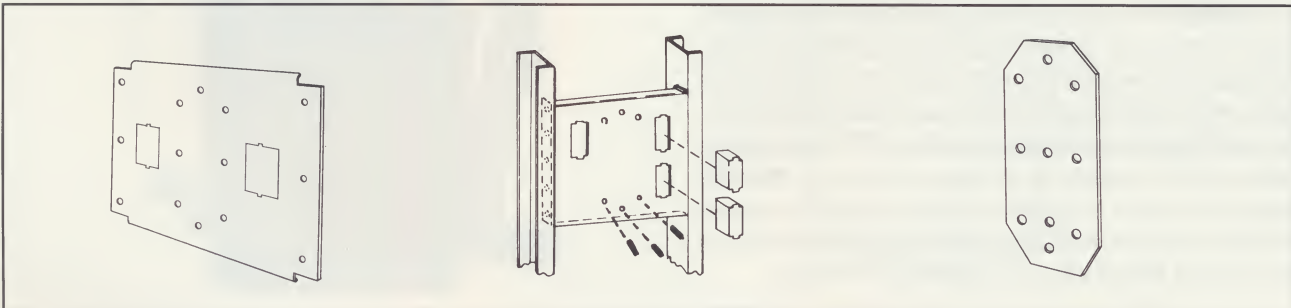

1410-000 and 1410-240

Use as interior or exterior plate. For use where studs are on 16" centers, or 24" centers in the case of the Model 1410-240.

1414-145

Interior wall plate. Mounts flush with face of studs which are on 16" centers. Provision for up to 3 single gang electrical boxes for power, antenna, and remote control.


1415-000

Back up plate. Mounts on opposite side of wall from TV bracket. (Not necessary when using internal wall mounting plate).

Wall Bracket Models

Number	Description	Tray Size	Tilt	Locking
043-354-02	Single Arm Design wall mount, 16" arm	20" x 11"	none	yes
043-356-02	Single Arm Design wall mount, 16" arm	20" x 11"	adjustable	yes
043-530-02	Single Arm Design wall mount, 16" arm	22" x 13"	none	yes
043-532-02	Single Arm Design wall mount, 16" arm	22" x 13"	fixed 10°	yes
043-531-02	Single Arm Design wall mount, 16" arm	22" x 13"	adjustable	yes
044-375-02	Single Arm Design wall mount, 18" arm	24" x 16"	none	yes
044-376-02	Single Arm Design wall mount, 18" arm	24" x 16"	fixed 10°	yes
2171-000	Single Arm Design wall mount, 16" arm	24" x 13.5"	none	no
2172-000	Single Arm Design wall mount, 16" arm	24" x 13.5"	fixed 10°	no
2173-000	Single Arm Design wall mount, 16" arm	24" x 13.5"	adjustable	no

New From Peerless The JUMBO™ Mount For Monitors Up To 35"

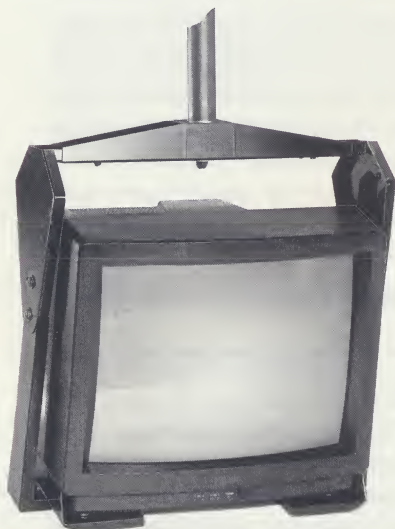

The Jumbo Mount is engineered for rugged strength, but designed for sleek and attractive appearance as well. It also offers security, a feature not found in similar yoke style mounts. Peerless' unique tamper-resistant fastener system is used to assemble the bracket itself, and also to mount the TV or monitor to the bracket's mounting surface.

For ceiling installation of sets ranging from 20" to 35" (diagonal screen size).

Model No. 055-640-02
For most 19" and 20" sets

Model No. 055-650-02
For most 25"-27" sets

Model No. 055-660-02
For sets larger than 27", up to 35"


Specifications:

The Ceiling mount shall be a Peerless JUMBO Mount, or equivalent yoke type mount. It shall be of a size and weight carrying capacity compatible with the TV or monitor being installed (Up to a maximum of 35" diagonal screen size - weight not to exceed 300 lbs.) The monitor shall attach to the bracket by means of Penta-Pin tamper resistant screws, or the equivalent. The side arms and hanger support of the bracket shall also be connected by means of tamper resistant fasteners, and they shall be connected in a way that allows for a forward tilt adjustable to approximately 20°.

VCR COMBINATION ADAPTOR

Specifications:

The VCR combination adaptor shall be a Peerless Model #040-081-02, or equivalent. It shall be constructed of 16 ga. steel. It shall be capable of being mounted with either a Peerless Single Arm Design wall mount, a Peerless Yoke Style Mount, or a Peerless JUMBO mount. The VCR mounting plate itself shall contain a universal, random hole perforation to facilitate the safe mounting of the VCR. This mounting plate will be attached to the upper portion of the VCR enclosure by means of tamper resistant Penta-Pin screws. This adaptor shall accommodate a Video Cassette Recorder, or Video Cassette Player up to 17" wide by 3-7/8" high.

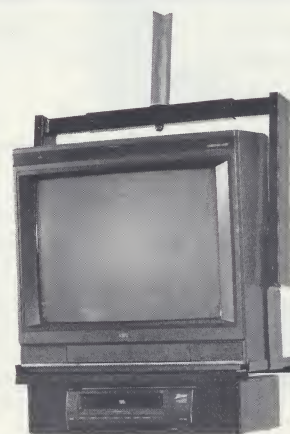

To receive Peerless' full line catalog and technical data sheets, call 1-800-729-0307, or write:

peerless sales company

1950 Hawthorne Avenue • Melrose Park, IL 60160 • FAX: 708-865-2941